

# General Purpose 3-phase Induction Motors

**Product Catalogue**

*Energy Efficient*  
*Motors*  
*series 3SIE*

**IE3**



Comply with the new efficiency  
classes for low-voltage three-  
phase motors

IEC 60034-30 standard  
and EU Regulation  
640/2009, 4/2014

## Certificates

**Cantoni Motor SA**  
ISO 9001  
Since September 30, 1999



**Besel SA**  
ISO 9001  
Since July 21, 1995

**Celma Indukta SA**  
ISO 9001  
Since April 1, 1993

ISO 14001  
Since November 15, 1999

**Emit SA**  
ISO 9001:2008  
ISO 14001:2004  
Since January 23, 2012



# Cantoni® GROUP



since 1950



## CELMA indukta

since 1920

since 1878



since 1921



## **Contents**

<b>General information</b>	<b>pages 5-14</b>
----------------------------	-------------------

*Introduction to SIE motors*

*Efficiency of motors*

*Ratings-tolerances*

*Standards*

*Insulation classification*

*Terminal box*

*Vibration and noise level*

*Degree of protection*

*Mounting arrangements*

*Bearings*

*Permissible loads on the shaft end*

*Housing, endshields*

*Description of the customised executions*

*Ordering information*

<b>Technical data</b>	<b>pages 16-20</b>
-----------------------	--------------------

---

<b>Dimensional drawings</b>	<b>pages 21-30</b>
-----------------------------	--------------------

---

<b>List of motor parts</b>	<b>pages 31-34</b>
----------------------------	--------------------

---

<b>Production program</b>	<b>page 35</b>
---------------------------	----------------

---

**INTRODUCTION**

New efficiency classes for the low-voltage three-phase motors (IE = International Efficiency).

Along with the international discussion on energy efficiency a worldwide harmonized energy efficiency standard classification system has been established for low-voltage three-phase asynchronous motors. For many years low-voltage three-phase motors in the European Union have been sold in three efficiency classes EFF3, EFF2 and EFF1. Aside from this, many different efficiency classification systems have been introduced and well-proven in many countries all over the world.

This was the reason for the International Electrotechnical Commission IEC to develop and publish an energy efficiency standard which replaces all previous national issues. In parallel IEC developed and issued a new standard for determining motor efficiency. The new standard IEC 60034-30-1 defines and harmonizes worldwide the efficiency classes IE1, IE2, IE3 and IE4 for low-voltage three-phase motors in the power range from 0.12 kW to 1000 kW (2p=2, 4, 6, 8)

**IE1 = Standard Efficiency**

**IE2 = High Efficiency**

**IE3 = Premium Efficiency**

According to IEC 60034-30-1 standard the efficiency has to be determined according to the new requirements given in the IEC 60034-2-1 standard.

According to the Comission Regulation (EC) No 640/2009 (introduced in July 2009) including Comission Regulation (EC) No 4/2014 the required efficiency class of general-purpose motors with 2p=2, 4, 6 (introduced to the market in the future) will be as follows:

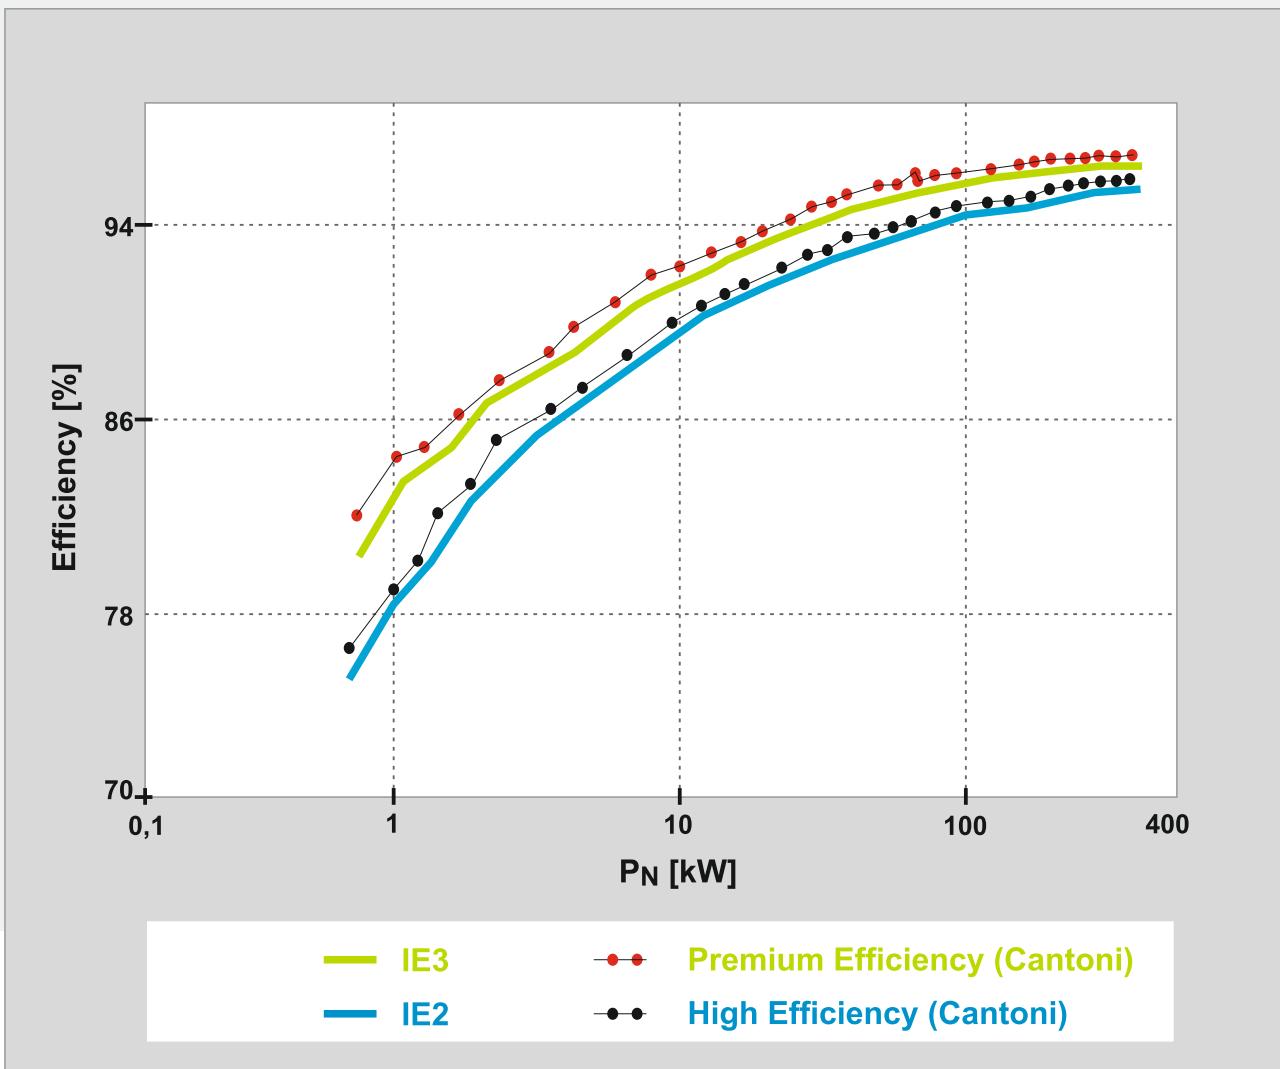
***From 1 January 2017: motors with a rated output between 0.75 - 375 kW shall have a minimum efficiency class of IE3, or IE2 if they are operated/equipped with electronic speed control (VSD).***

Electronic speed control is carried out using a frequency converter (VSD) that adjusts the speed of the motor - and therefore the torque produced - based on the energy needed.

## EFFICIENCY OF MOTORS

The present catalogue describes the electric motors which belong to the efficiency class IE3 (Premium Efficiency) and motors excluded from the Regulations (EC) 640/2009 and 4/2014 (motors with  $2p = 8, 10, 12$  and with rated output below 0.75kW and above 375kW).

**Comparison between the efficiency of Cantoni Group motors (for example  $2p=4$ ) and efficiency class IE2/IE3 requirements according to the IEC 60034-30-1.**



The efficiency class system specified under IEC 60034-30-1 is valid for low voltage three phase squirrel cage induction motors with the following specifications:

- Rated voltage up to 1.000 V
- Rated output between 0.12 kW and 1000 kW
- Either 2, 4, 6 or 8 poles
- Rated on the basis of continuous duty (S1)
- Supplied directly from mains
- With ambient temperature within the range of -30°C ÷ +60°C
- With altitude up to 4000 m. a.s.l.

Motors with flanges, feet and/or shafts with mechanical dimensions different from IEC 60072-1 are also covered by this standard.

**RATINGS - TOLERANCES**

Permissible deviations between real values and catalogue values according to the IEC 60034-1:

Power factor cos $\varphi$	$\Delta \cos \varphi = -1/6 (1 - \cos \varphi_N)$
Efficiency $\eta$	$\Delta \eta = -15\% (100 - \eta_N)$ for $P_N \leq 150 \text{ kW}$ $\Delta \eta = -10\% (100 - \eta_N)$ for $P_N > 150 \text{ kW}$
Speed n	$\Delta n = \pm 20\% (n_s - n_N)$ for $P_N > 1 \text{ kW}$ $\Delta n = \pm 30\% (n_s - n_N)$ for $P_N \leq 1 \text{ kW}$
Locked rotor current $I_L/I_N$	$\Delta (I_L/I_N) = +20\% (I_L/I_N)$
Locked rotor torque $T_L/T_N$	min $(T_L/T_N) = -15\% (T_L/T_N)$ max $(T_L/T_N) = +25\% (T_L/T_N)$
Breakdown torque $T_B/T_N$	$\Delta (T_B/T_N) = -10\% (T_B/T_N)$
Moment of inertia J [kgm <sup>2</sup> ]	$\Delta J = \pm 10\% J$
Sound pressure level $L_{pA}$ [dB]	$\Delta L_{pA} = +3 \text{ dB /A}$

**STANDARDS**

The electric motors are manufactured according to the international standards:

Rating and performance	IEC 60034-1
Methods for determining losses and efficiency	IEC 60034-2-1
Classification of degrees of protection	IEC 60034-5
Methods of cooling	IEC 60034-6
Symbols of construction and mounting arrangements	IEC 60034-7
Terminal markings and direction of rotation	IEC 60034-8
Noise limits	IEC 60034-9
Dimensions and output of electric machines	IEC 60072-1
Vibration limits	IEC 60034-14

**New IEC standards regarding efficiency classes (IEC 60034-30-1) and efficiency measurements (IEC 60034-2-1)**

The resulting efficiency values differ from those obtained under the previous IEC 60034-2:1996 testing standard.  
It must be noted that the efficiency values are only comparable if they are obtained using the same measuring method.

**EU Regulation 640/2009 and 4/2014 adapted on 6 January 2014**

Commission Regulation 640/2009, adapted on 22 July 2009, specifies the requirements regarding the ecodesign of electric motors and the use of electronic speed control (VSD).

All the motors are manufactured according to Quality Assurance System consistent with ISO 9001.

The motors covered by the present catalogue comply with the regulations and standards effective in other countries, consistent with IEC standards.

All the motors described in the present catalogue are provided with CE mark.

IE1

IE2

IE3

ISO9001

IEC

CE

## INSULATION CLASSIFICATION

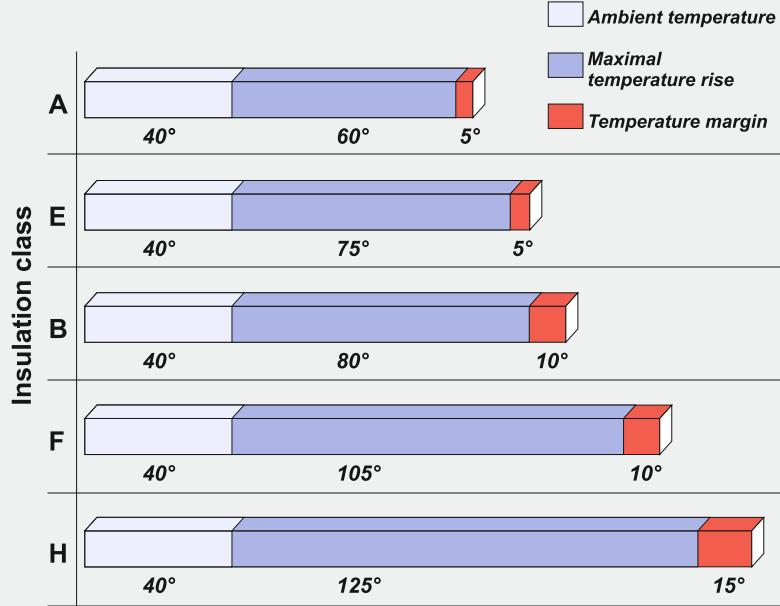
The insulation system of an electric motor is determined by a given insulation class on the basis of its thermal resistance. This thermal resistance should be guaranteed by the entire set of electric insulating materials used in the motor insulating system.

Thermal resistance classification is related to the temperature of the hotspot in the insulation occurring during rated operating conditions of the electric motor, allowing for the highest permissible rise in average temperature.

This rise should be selected so that at the highest permissible ambient temperature, the temperature of the hotspot in insulation will not exceed the value assigned to a given thermal resistance class.

Symbols of thermal resistance classes (permissible insulation temperatures at 40°C ambient temperature)

Symbol	Temperature [° C]
A	105
E	120
B	130
F	155
H	180



**Insulation class F in an electric motor means that at ambient temperature of 40°C the temperature rise of the winding may be max. 105°C with the additional temperature margin of 10°C (under specified measuring conditions in accordance with the IEC 60034-1 standard).**

## Class F

**The standard motors made by Cantoni Motor in their basic version have the insulation class F while the temperature rise is for class B. This means longer life for motors.**

**For special request we can deliver motors equipped with insulation class H.**

**Strengthened insulation system gives possibility to safe operation with frequency converters.**

## MOTOR FEET

Motors with frame size ≤ 132 have screwed feet.

Motors with frame size > 132 up to 315 have screwed feet or feet integrated with the motor housing.

Motors with frame size from 355 have feet integrated with the motor housing.

## TERMINAL BOX

The terminal boxes of low voltage motors have threaded inlet holes designed for mounting cable glands.

The box contains a terminal board with marked terminals making possible connection of supply cables.

In addition, terminal boxes may be provided with additional terminals connected to the ends of thermal protection or anticondensation heater circuits and extra glands to connect these circuits.

Low voltage high-power motors contain terminal boxes with cable gland seals.

The circuits of thermal protection and anticondensation heaters are connected to separate terminal boxes.

Inside the boxes there are special clamps used to ground the supply cable armouring.

## VIBRATION LEVEL AND NOISE LEVEL
















The rotor balancing method guarantees that a standard vibration level A is maintained in accordance with the IEC 60034-14 and a standard sound power level is maintained in accordance with the IEC 60034-9. On customer's demand the motors can be made with reduced vibration or noise level.

**level A**

General Purpose 3-phase Induction Motors  
**INTERNATIONAL PROTECTION MARKING IP**

According to the IEC 60034-5 standard the electric motors are provided with IP code which determines the degree of protection (ensured by the housing) against penetration of solid matter and fluids.

**IP55**

PROTECTION AGAINST PENETRATION OF SOLID MATTER		PROTECTION AGAINST PENETRATION OF FLUIDS		IK MECHANICAL PROTECTION	
1st digit	DESCRIPTION	2nd digit	DESCRIPTION	3rd digit	DESCRIPTION
				00	No protection
0		Not protected		01	 Striking energy: 0.15 J
1		Protected against solid bodies larger than 50 mm		02	 Striking energy: 0.20 J
2		Protected against solid bodies larger than 12 mm		03	 Striking energy: 0.37 J
3		Protected against solid bodies larger than 2.5 mm		04	 Striking energy: 0.50 J
4		Protected against solid bodies larger than 1 mm		05	 Striking energy: 0.70 J
5		Protected against deposition of dust		06	 Striking energy: 1 J
6		Totally protected against deposition of dust		07	 Striking energy: 2 J
				08	 Striking energy: 5 J
				09	 Striking energy: 10 J
				10	 Striking energy: 20 J

All Cantoni Group standard motors are manufactured with IP 55 degree of protection according to the standard in force (IEC 60034-5). The following table lists its characteristics.













Each size 80 to 180 motor is equipped with seal rings (Simmerring or V-ring) on drive side and on non drive side. Labyrinth seals protect the motors from size 200 and above.

The terminal box is sealed with a gasket.

**Motors with a higher degree of protection are available on request.**

## MOUNTING ARRANGEMENTS

According to the IEC 60034-7 standard

Horizontal shaft				Vertical shaft			
	Designation		Frame size		Designation		Frame size
	Code II IM 1001	Code I IM B3	56 ÷ 500		Code II IM 1011	Code I IM V5	56 ÷ 315 without 3SIE 315 M6B,C,D without SIE 315 M8C,D
	Code II IM 1051	Code I IM B6	56 ÷ 280		Code II IM 1031	Code I IM V6	56 ÷ 315 without 3SIE 315 M6B,C,D without SIE 315 M8C,D
	Code II IM 1061	Code I IM B7	56 ÷ 280		Code II IM 2011 or IM 2111	Code I IM V15	56 ÷ 355
	Code II IM 1071	Code I IM B8	56 ÷ 280		Code II IM 2031 or IM 2131	Code I IM V36	56 ÷ 355
	Code II IM 2001	Code I IM B35	56 ÷ 500		Code II IM 3011	Code I IM V1	56 ÷ 500
	Code II IM 2101	Code I IM B34	56 ÷ 132		Code II IM 3031	Code I IM V3	56 ÷ 280
	Code II IM 3001	Code I IM B5	56 ÷ 315 without 3SIEK 315 M6B,C,D without SIEK 315 M8C,D		Code II IM 3611	Code I IM V18	56 ÷ 180
	Code II IM 3601	Code I IM B14	56 ÷ 132		Code II IM 3631	Code I IM V19	56 ÷ 180

\* Other mounting arrangements available on special request



## VERSION WITH ROLLER BEARINGS for motors 355

Mechanical Size	Type of construction	No. of poles, 2p	D.E. bearing	N.D.E. bearing
3SIE 355 ML	IM1001 (B3)	4 ÷ 6	NU222 EM1C3	6222 C3
3SIE 355 H	IM1001 (B3)	4 ÷ 6	NU322 EM1C3	6322 C3

Horizontal mounting					
Motor type	Number of poles	Length of shaft extension E(mm)	Permissible radial forces	Permissible axial forces	
			FX0	FXmax	FA
3SIE 355 ML	4	210	22	18	5
	6	210	23	15	5,5
3SIE 355 H	4	210	27	17	6
	6	210	29	15	7

## VERSION WITH ROLLER BEARINGS for motors SEE355 and Sh355-500

Mechanical Size	Type of construction	No. of poles, 2p	D.E. bearing	N.D.E. bearing
SEE 355	IM1001 (B3)	8	NU222 EM1C3	6222 C3
Sh 355..s	IM1001 (B3)	4 ÷ 8	NU322 EM1C3	6322 C3
Sh 400..s	IM1001 (B3)	4 ÷ 10	on request	on request
Sh 450..s	IM1001 (B3)	4 ÷ 12	on request	on request
Sh 500..s	IM1001 (B3)	4 ÷ 10	on request	on request

Horizontal mounting					Vertical operation
Motor type	Number of poles	Length of shaft extension E(mm)	Permissible radial forces	Permissible axial forces	
			FX0	FXmax	
SEE 355	8	210	24	14	6
	4	210	27	17	6
Sh 355..s	8	210	30	15	8
	4	210			on request
Sh 400 Sh 450 Sh 500	4 ÷ 8		on request		

## PERMISSIBLE LOADS ON THE SHAFT END

Value of radial force  $F_R$  acting on the shaft end for a given belt pulley diameter is calculated according to the following formula:

$$F_R = \frac{19600 \times P \times k}{D_k \times n} [N]$$

where:  
 P - motor output [kW]  
 $D_k$  - belt pulley diameter [m]  
 n - speed [rpm]  
 k - belt tension factor:  
     for V-belts k=2,2  
     for flat belts k=3

Value of force  $F_R$  acting on any point of the shaft end (between points X=max and X=0) may be calculated according to the following formula:

$$F_R = F_{x0} - \frac{X}{E} \times (F_{x0} - F_{xmax}) [N]$$

where:  
 $F_{x0}$  - value of  $F_R$  force acting on the beginning of the shaft end  
 $F_{xmax}$  - value of  $F_R$  force acting on the end of the shaft end  
 E - lenght of the shaft end

Other specifications dependent on the frame size:

Frame size	Degree of protection	Position of the terminal box	Number of terminals	Number of cable outlets	Optional rotation of the terminal box	Glands	Temperature sensors in winding	Bearing lubrication on the run	Thermal protection of bearings
56	IP 55	top	6	1	180°	M 20	on request	no	no
63	IP 55	top	6	1	180°	M 20	on request	no	no
71	IP 55	top	6	1	180°	M 20	on request	no	no
80	IP 55	top	6	1	180°	M 20	on request	no	no
90	IP 55	top	6	2	180°	M 20	on request	no	no
100	IP 55	top	6	2	180°	M 20	on request	no	no
112	IP 55	top	6	2	180°	M 25	on request	no	no
132	IP 55	top	6	2	180°	M 25	on request	no	no
160	IP 55	top	6	2	180°	M 40	on request	on request	on request
180	IP 55	top	6	2	180°	M 40	on request	on request	on request
200	IP 55	top *	6	2	4 × 90°	M 50	PTC	yes	on request
225	IP 55	top *	6	2	4 × 90°	M 50	PTC	yes	on request
250	IP 55	top *	6	2	4 × 90°	M 63	PTC	yes	on request
280	IP 55	top *	6	2	4 × 90°	M 63	PTC	yes	on request
315	IP 55	top *	6	2	4 × 90°	M 76	PTC	yes	on request
355ML	IP 55	top	6	2	4 × 90°	M 76	PTC Mark A	yes	on request
355H	IP 55	top	6	2	4 × 90°	M 90	Pt 100	yes	Pt 100
400	IP 55	top	6 (bars)	3	180°	3xφ55	Pt 100	yes	Pt 100
450	IP 55	top	3 (bars)	3	180°	3xφ55	Pt 100	yes	Pt 100
500	IP 55	top	3 (bars)	3	180°	3xφ55	Pt 100	yes	Pt 100

 \* terminal box on right side for 2Sg motors series ( $2p = 8 \div 12$ )

**BEARINGS**

Frame size	Number of poles	Bearings	The bearings in basic version of motors for horizontal and vertical duty, excluding 3SIE 315 with $2p=2$ .
Sh 56	2 ÷ 6	6201 2Z	
Sh 63	2 ÷ 8	6202 2Z	
Sh 71	2 ÷ 8	6203 2Z	
3SIE 80	2 ÷ 6	6204 2Z C3	
3SIE 90	2 ÷ 6	6205 2Z C3	
3SIE 100	2 ÷ 6	6206 2Z C3	
3SIE 112	2 ÷ 6	6306 2Z C3	
3SIE 132	2 ÷ 6	6308 2Z C3	
3SIE 160	2 ÷ 6	6309 2Z C3	
3SIE 180	2 ÷ 6	6311 2Z C3	
3SIE 200	2 ÷ 6	6312 C3	
3SIE 225	2 ÷ 6	6313 C3	
3SIE 250	2 ÷ 6	6315 C3	
3SIE 280	2	6315 C3	
3SIE 280	4 ÷ 6	6318 C3	
3SIE 315S,MA,MB	2	6315 C3	
3SIE 315MC	2	6316 C3	
3SIE 315S,MA,MB	4 ÷ 6	6318 C3	
3SIE 315MC,MD	4 ÷ 6	6320 C3/6318 C3	

**BEARINGS for 2Sg ( $2p = 8 \div 12$ )**

Frame size	Number of poles	Bearings
2Sg 200	8 ÷ 12	6312 C3
2Sg 225	8 ÷ 12	6313 C3
2Sg 250	8 ÷ 12	6315 C3
2Sg 280	8 ÷ 12	6317 C3
2Sg 315	8 ÷ 12	6318 C3

Frame Size	Type of construction	No. of poles, 2p	D.E. bearing	N.D.E. bearing	The bearings in basic version of motors for horizontal and vertical duty.
3SIE 355 ML	IM1001 (B3)	2	6217 C3	6217 C3	
3SIEL 355 ML	IM2001 (B35)	4 ÷ 6	6222 C3	6222 C3	
3SIEK 355 ML	IM3011 (V1)	4 ÷ 6	6322 C3	6322 C3	
3SIE 355 H	IM1001 (B3)	2	6217 C3	6217 C3	
3SIEL 355 H	IM2001 (B35)	4 ÷ 6	6322 C3	6322 C3	
3SIEK 355 H	IM3011 (V1)	4 ÷ 6	6322 C3	6322 C3	

Frame	Type of	No. of	D.E.	N.D.E.	
Size	construction	poles, 2p	bearing	bearing	
SEE 355	IM1001 (B3)	8	6222 C3	6222 C3	
SLEE 355	IM2001 (B35)	8	6222 C3	6222 C3	
SVEE 355	IM3011 (V1)	8	6322 C3	6322 C3	
Sh 355..s	IM1001 (B3)	2	6217 C3	6217 C3	
SLh 355..s	IM2001 (B35)	4 ÷ 8	6322 C3	6322 C3	
SVh 355..s	IM3001 (V1)	4 ÷ 8	6322 C3	6322 C3	
Sh 400..s	IM1001 (B3)	2			
SLh 400..s	IM2001 (B35)	4 ÷ 10			
SVh 400..s	IM3011 (V1)	4 ÷ 10			
Sh 450..s	IM1001 (B3)	4 ÷ 12			
SLh 450..s	IM2001 (B35)	4 ÷ 12			on request
SVh 450..s	IM3011 (V1)	4 ÷ 12			
Sh 500..s	IM1001 (B3)	4 ÷ 10			
SLh 500..s	IM2001 (B35)	4 ÷ 10			
SVh 500..s	IM3011 (V1)	4 ÷ 10			

## **HOUSING, END SHIELDS, FEET**

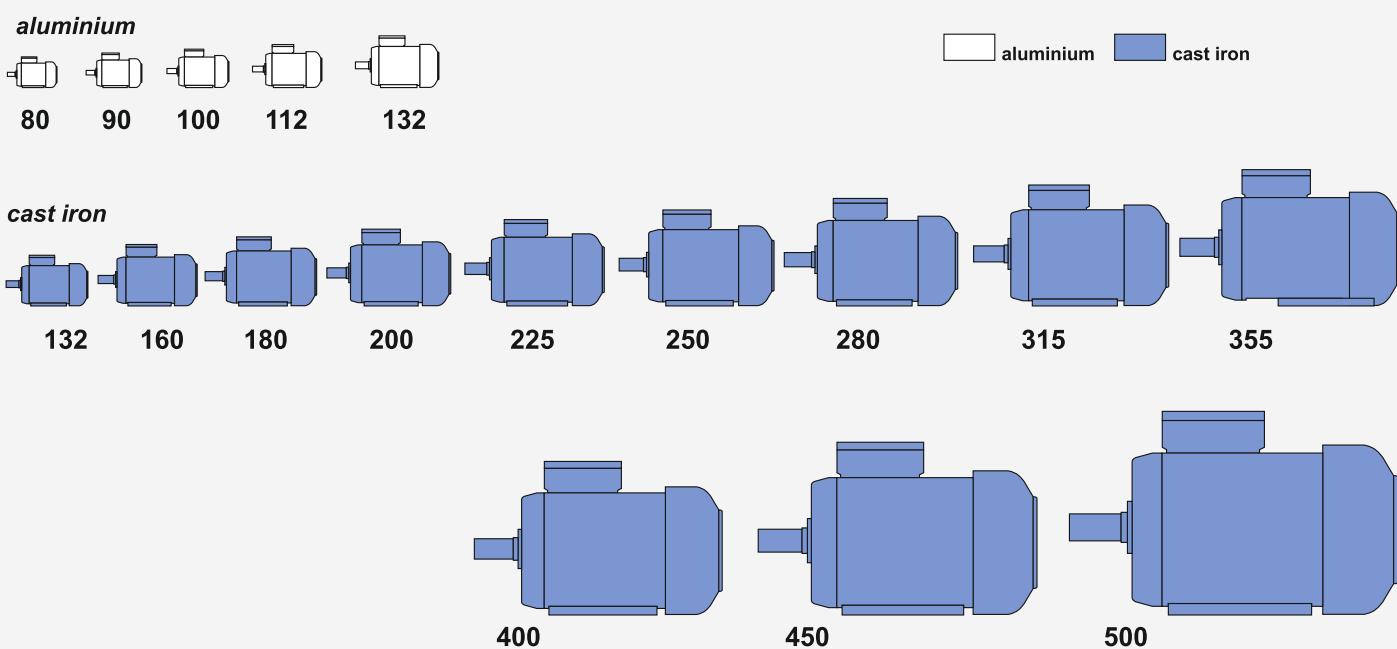
Frame size [mm]	Motor housing	End shields	Feet
56	Aluminium	Aluminium	Aluminium - screwed
63	Aluminium	Aluminium	Aluminium - screwed
71	Aluminium	Aluminium	Aluminium - screwed
3SIE 80	Aluminium	Aluminium	Aluminium - screwed
3SIE 90	Aluminium	Aluminium	Aluminium - screwed
3 SIE100	Aluminium	Aluminium	Aluminium - screwed
3SIE 112	Aluminium	Cast iron	Aluminium - screwed
3SIE 132	Aluminium / cast iron	Cast iron	Aluminium - screwed
3SIE 160	Cast iron	Cast iron	Cast iron - screwed or integrated
3SIE 180	Cast iron	Cast iron	Cast iron - screwed or integrated
3SIE 200	Cast iron	Cast iron	Cast iron - screwed or integrated
3SIE 225	Cast iron	Cast iron	Cast iron - screwed or integrated
3SIE 250	Cast iron	Cast iron	Cast iron - screwed or integrated
3SIE 280	Cast iron	Cast iron	Cast iron - screwed or integrated
3SIE 315	Cast iron	Cast iron	Cast iron - screwed or integrated
355	Cast iron	Cast iron	Cast iron - integrated
400	Cast iron	Cast iron	Cast iron - integrated
450	Cast iron	Cast iron	Cast iron - integrated
500	Cast iron	Cast iron	Cast iron - integrated

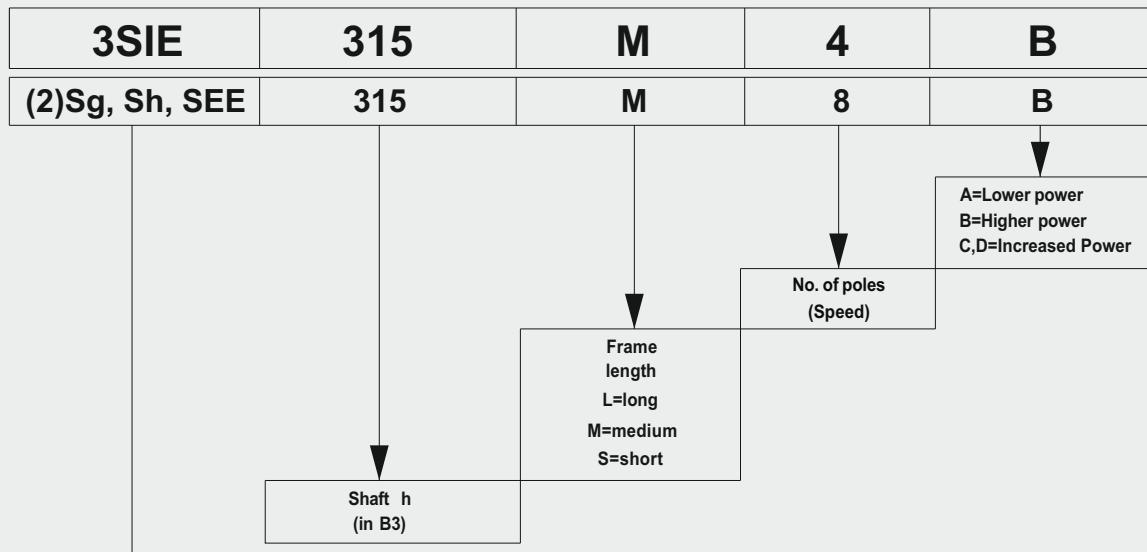
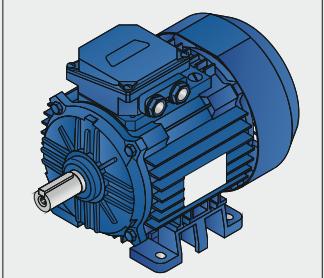
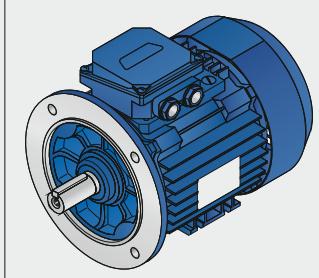
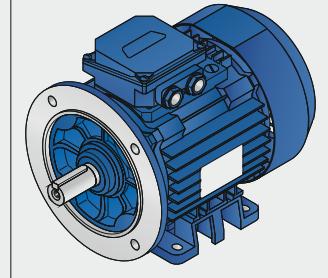
In motors series Sh, Sg of frame size 80, 90 and 100mm: on request end shields may be made of cast iron.

In motors series 3SIE of frame size 80 and 90mm: on request end shields may be made of cast iron.

In motors of frame size 132: feet may be integrated with housing.

### **Motor housing**



**DESCRIPTION OF THE CATALOGUE VERSION****3SIE**  
(2)Sg, Sh, SEE**3SIEK**  
(2)SKg, SKh, SVEE, SVh**3SIEL**  
(2)SLg, SLh, SLEE**ORDERING INFORMATION****Orders for motors should specify:**

- motor type designation,
- rated output,
- rated speed,
- operating duty,
- supply voltage and connection,
- frequency,
- mounting arrangements, end shield material,
- degree of protection,
- type of driven machine,
- other details regarding special requests,

**and information concerning additional accessories e.g.**

- thermal protection,
- anticondensation heaters,
- vibration sensors,
- etc.

**When ordering high-power or special purpose motors one should also indicate:**

- required direction of rotation,
- required degree of interior protection,
- method of start-up,
- method of coupling with the driven unit (gears, dimensions of belt pulleys, etc.),
- type of machine driven (nature of load), including the moment of inertia  $J$  or flywheel effect  $GD^2$  brought to the motor shaft,
- other customer's specifications.

**When ordering spare parts one should specify:**

- full designation of the motor type including its serial number (provided on the nameplate) or catalogue number,
- degree of protection,
- mounting arrangement,
- name of part,
- number of pieces.

**As part of our development program, we reserve the right to alter or amend any of the specifications without giving prior notice**





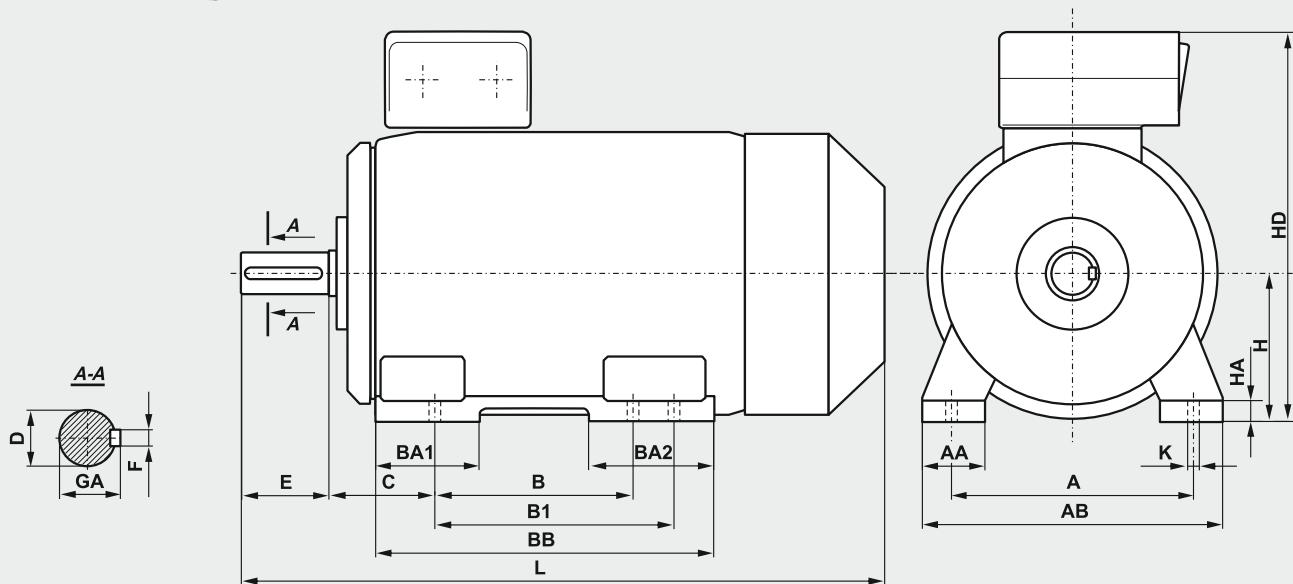
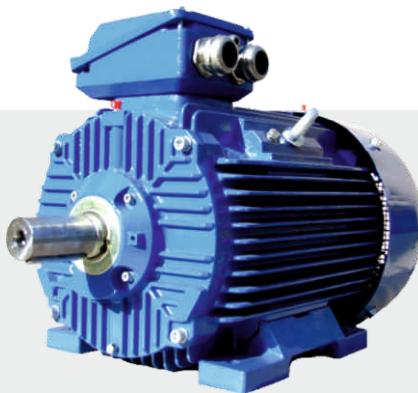









**Dimensions for FOOT MOUNTED MOTORS - IM B3**




Motor type	A	B	B1	C	D	E	F	GA	H	HA	K	AA	AB	BA1	BA2	BB	HD	L
3SIE200	318	305	-	133	55	110	16	59	200	32	19	80	400	113	113	380	520	850
3SIE225S4	356	286	311	149	60	140	18	64	225	34	19	85	440	115	115	380	570	930
3SIE225M2	356	286	311	149	55	110	16	59	225	34	19	85	440	115	115	380	570	900
3SIE225M4-6	356	286	311	149	60	140	18	64	225	34	19	85	440	115	115	380	570	930
3SIE250M2	406	349	-	168	60	140	18	64	250	37	24	90	480	135	135	445	635	1010
3SIE250M4-6	406	349	-	168	65	140	18	69	250	37	24	90	480	135	135	445	635	1040
3SIE280S2	457	368	419	190	65	140	18	69	280	40	24	105	550	130	165	520	720	1135
3SIE280S4-6	457	368	419	190	75	140	20	79,5	280	40	24	105	550	130	165	520	720	1135
3SIE280M2	457	368	419	190	65	140	18	69	280	40	24	105	550	130	165	520	720	1135
3SIE280M4-6	457	368	419	190	75	140	20	79,5	280	40	24	105	550	130	165	520	720	1135
3SIE315S2	508	406	457	216	65	140	18	69	315	48	28	120	610	160	160	565	805	1235
3SIE315S4-6	508	406	457	216	80	170	22	85	315	48	28	120	610	160	160	565	805	1265
3SIE315M2A;B	508	406	457	216	65	140	18	69	315	48	28	120	610	160	160	565	805	1235
3SIE315M4A;B;6A	508	406	457	216	80	170	22	85	315	48	28	120	610	160	160	565	805	1265
3SIE280M6B	508	406	457	216	80	170	22	85	315	48	28	135	610	135	205	600	805	1355
3SIE315M2C	508	406	457	216	70	140	20	74,5	315	48	28	135	610	135	205	600	805	1290
3SIE315M4C	508	406	457	216	80	170	22	85	315	48	28	135	610	135	205	600	805	1320
3SIE315M6C	508	406	457	216	80	170	22	85	315	48	28	135	610	135	205	600	805	1320
3SIE315M6D	508	406	457	216	90	170	25	95	315	48	28	135	610	135	205	600	805	1320
3SIE 355 ML (2)	610	560	630	254	80	170	22	85	355	50	28	150	720	250	300	890	935	1580
3SIE 355 ML (4, 6)	610	560	630	254	100	210	28	106	355	50	28	150	720	250	300	890	935	1620
3SIE 355 H (2)	610	900	-	200	70	140	20	74,5	355	45	28	160	730	265	265	1045	995	1800
3SIE 355 H (4, 6)	610	900	-	200	100	210	28	106	355	45	28	160	730	265	265	1045	995	1870

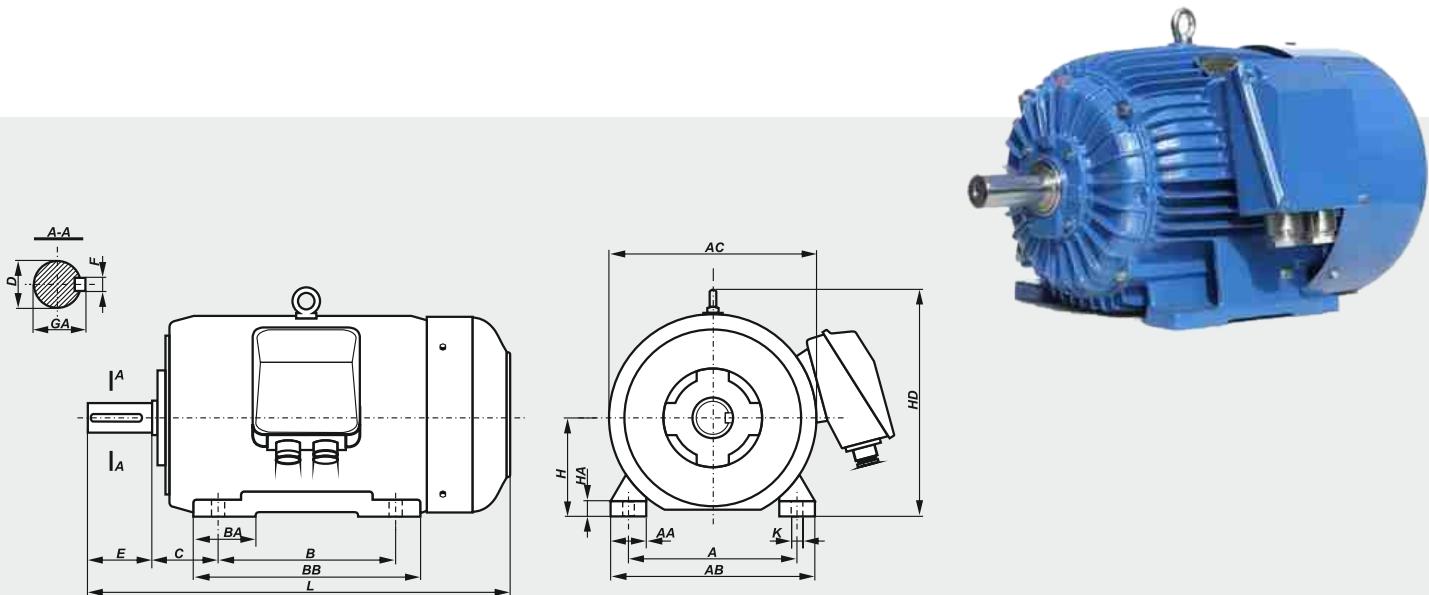**General Purpose 3-phase Induction Motors**  
**Dimensions for FOOT MOUNTED MOTORS - IM B3**






Motor type	A	B	C	D	E	F	GA	H	HA	K	AA	AB	AC	BA	BB	HD	L
2Sg 200 L8-12	318	305	133	55m6	110	16h9	59	200	32	19	80	400	450	100	380	485	825
2Sg 225 S8-12	356	286	149	60m6	140	18h9	64	225	34	19	85	445	505	110	355	535	865
2Sg 225 M8-12	356	311	149	60m6	140	18h9	64	225	34	19	85	445	505	110	380	535	890
2Sg 250 M8-12	406	349	168	65m6	140	18h9	69	250	36	24	90	495	540	120	420	590	965
2Sg 280 S8-12	457	368	190	75m6	140	20h9	79,5	280	40	24	100	560	620	165	520	660	1040
2Sg 280 M8-12	457	419	190	75m6	140	20h9	79,5	280	40	24	100	560	620	165	520	660	1040
2Sg 315 S8-12	508	406	216	80m6	170	22h9	85	315	46	28	105	610	620	190	560	695	1210
2Sg 315 M8-12	508	457	216	80m6	170	22h9	85	315	46	28	105	610	620	190	560	695	1210

**Dimensions for FOOT MOUNTED MOTORS - IM B3**

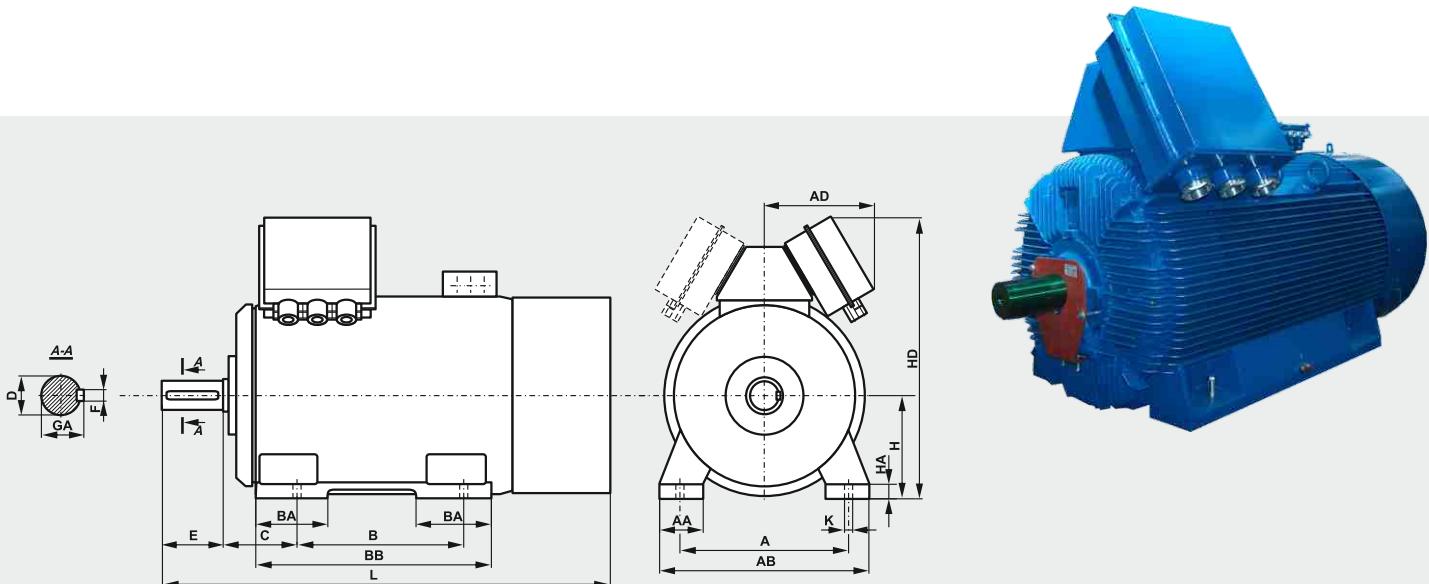

Motor type	Poles	A	B	C	D	E	F	GA	H	HA	K	AA	AB	AD	BA	BB	HD	L
Sh 355...s	2	610	900	200	70	140	20	74,5	355	45	28	160	730	-	265	1045	995	1800
Sh 355...s	4÷8	610	900	200	100	210	28	106	355	45	28	160	730	-	265	1045	995	1870
Sh 400...s	2	686	1000	224	80	170	22	85	400	50	35	175	840	520	265	1160	1255	1980
Sh 400...s	4÷8	686	1000	224	110	210	28	116	400	50	35	175	840	520	265	1160	1255	1960
Sh 450...s	4÷12	750	1120	254	110	210	28	116	450	60	35	205	940	560	340	1320	1356	2105
Sh 500...s	4÷10	850	1250	280	120	210	32	127	500	70	42	223	1050	560	300	1450	1470	2430

**Dimensions for FLANGE MOUNTED MOTORS - IM B5, IM V1**

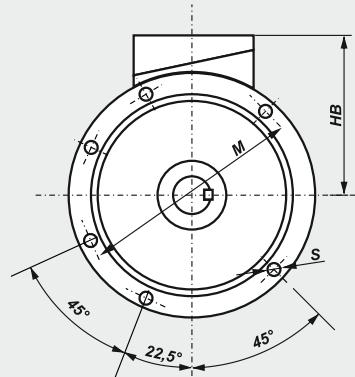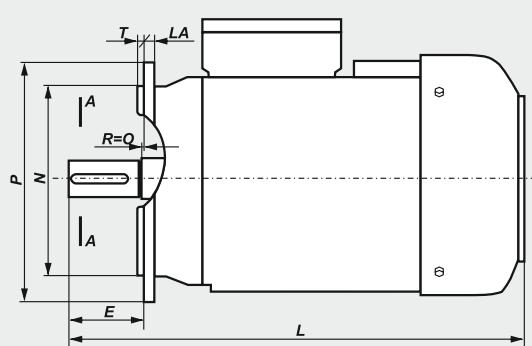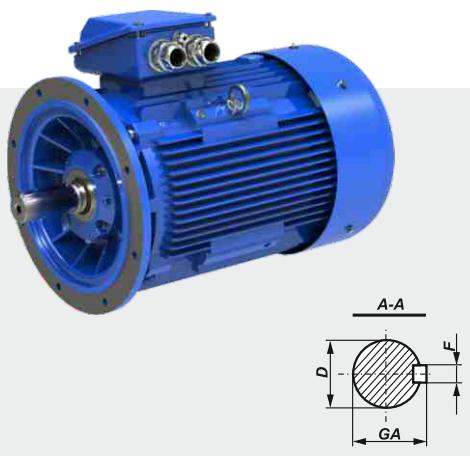


Motor type	D	E	F	GA	M	N	P	LA	T	HB	L	S (f)	S (holes)
SKh 56-A	9j6	20	3h9	10,2	100	80j6	120	8	3	98	183	7	4
SKh 56-B	9j6	20	3h9	10,2	100	80j6	120	8	3	98	193	7	4
SKh 63-A	11j6	23	4h9	12,5	115	95j6	140	9	3	102	200	10	4
SKh 63-B	11j6	23	4h9	12,5	115	95j6	140	9	3	102	210	10	4
SKh 71-A	14j6	30	5h9	16	130	110j6	160	9	3,5	111	223	10	4
SKh 71-B	14j6	30	5h9	16	130	110j6	160	9	3,5	111	245	10	4
SKh 80-A	19j6	40	6h9	21,5	165	130j6	200	10	3,5	120	266	12	4
SKh 80-B	19j6	40	6h9	21,5	165	130j6	200	10	3,5	120	278	12	4
3SIEK 80-A	19j6	40	6h9	21,5	165	130j6	200	10	3,5	119	278	12	4
3SIEK 80-B	19j6	40	6h9	21,5	165	130j6	200	10	3,5	119	306	12	4
3SIEK 90S-2,4,6,L2	24j6	50	8h9	27	165	130j6	200	8	3,5	148	331	12	4
3SIEK 90L-4,6	24j6	50	8h9	27	165	130j6	200	8	3,5	148	356	12	4
3SIEK 100L-2,6	28j6	60	8h9	31	215	180j6	250	11	4	157	377	15	4
3SIEK 100L-4A,4B	28j6	60	8h9	31	215	180j6	250	11	4	157	417	15	4
3SIEK 112M-2,6	28j6	60	8h9	31	215	180j6	250	12	4	168	398	15	4
3SIEK 112M-4	28j6	60	8h9	31	215	180j6	250	12	4	168	425	15	4
3SIEK 132S	38k6	80	10h9	41	265	230j6	300	12	4	197	512	15	4
3SIEK 132M	38k6	80	10h9	41	265	230j6	300	12	4	197	512	15	4
3SIEK 160M	42k6	110	12h9	45	300	250j6	350	13	5	223	643	19	4
3SIEK 160L	42k6	110	12h9	45	300	250j6	350	13	5	223	643	19	4
3SIEK 180M-2,4	48k6	110	14h9	51,5	300	250j6	350	13	5	234	723	19	4
3SIEK 180L-4,6	48k6	110	14h9	51,5	300	250j6	350	13	5	234	723	19	4
3SIEK 200	55	110	16	59	350	300	400	16,5	5	320	850	19	4
3SIEK 225S4	60	140	18	64	400	350	450	18	5	345	930	19	8
3SIEK 225M2	55	110	16	59	400	350	450	18	5	345	900	19	8
3SIEK 225M4-6	60	140	18	64	400	350	450	18	5	345	930	19	8
3SIEK 250M2	60	140	18	64	500	450	550	23	5	385	1010	19	8
3SIEK 250M4-6	65	140	18	69	500	450	550	23	5	385	1040	19	8
3SIEK 280S2	65	140	18	69	500	450	550	23	5	440	1135	19	8
3SIEK 280S4-6	75	140	20	79,5	500	450	550	23	5	440	1135	19	8
3SIEK 280M2	65	140	18	69	500	450	550	23	5	440	1135	19	8
3SIEK 280M4-6	75	140	20	79,5	500	450	550	23	5	440	1135	19	8
3SIEK 315S2*	65	140	18	69	600	550	660	23	6	490	1235	24	8
3SIEK 315S4-6*	80	170	22	85	600	550	660	23	6	490	1265	24	8
3SIEK 315M2A;B*	65	140	18	69	600	550	660	23	6	490	1235	24	8
3SIEK 315M4A;B;6A*	80	170	22	85	600	550	660	23	6	490	1265	24	8
3SIEK 315M6B*	80	170	22	85	600	550	660	23	6	490	1355	24	8
3SIEK 315M2C*	70	140	20	74,5	600	550	660	23	6	490	1290	24	8
3SIEK 315M4C*	80	170	22	85	600	550	660	23	6	490	1320	24	8
3SIEK 315M6C*	80	170	22	85	600	550	660	23	6	490	1320	24	8
3SIEK 315M6D*	90	170	25	95	600	550	660	23	6	490	1320	24	8
3SIEK 355 ML (4 - 6)*	100m6	210	28h9	106	740	680	800	24	6	580	1620	22	8
3SIEK 355 H (4 - 6)*	100m6	210	28h9	106	740	680	800	24	6	638	1955	22	8
SVEE 355ML8*	100	210	28	106	740	680	800	24	6	580	1620	22	8

\* only in vertical position IM V1

**Dimensions for FLANGE MOUNTED MOTORS - IM B5, IM V1**  
**MOTORS series Sh and Sg 2p=8**


Type of motor	D	E	F	GA	M	N	P	LA	T	S	HB	L
SKh 90S ...	24j6	50	8h9	27	165	130j6	200	8	3,5	12	130	305
SKh 90L ...	24j6	50	8h9	27	165	130j6	200	8	3,5	12	130	330
SKg 100L ...	28j6	60	8h9	31	215	180j6	250	11	4	15	140	376
SKg 112M ...	28j6	60	8h9	31	215	180j6	250	12	4	15	164	384
SKg 132S ...	38k6	80	10h9	41	265	230j6	300	12	4	15	178	463
SKg 132S-2B	38k6	80	10h9	41	265	230j6	300	12	4	15	178	501
SKg 132M ...	38k6	80	10h9	41	265	230j6	300	12	4	15	178	501
SKg 160M ...	42k6	110	12h9	45	300	250j6	350	13	5	19	210	612
SKg 160L ...	42k6	110	12h9	45	300	250j6	350	13	5	19	210	656
SKg 180M ...	48k6	110	14h9	51,5	300	250j6	350	13	5	19	228	705

**Dimensions for FLANGE MOUNTED MOTORS - IM B5, IM V1**

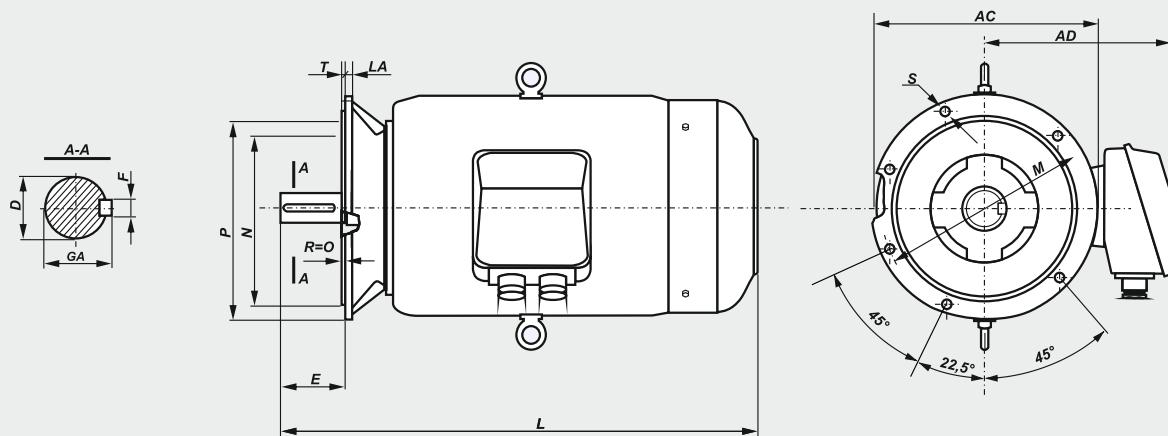

Motor type	D	E	F	GA	AC	AD	L	LA	M	N	P	T	S	∅ Holes
2SKg 200 L8-12	55m6	110	16h9	59	450	340	825	16,5	350	300j6	400	5	18	4
2SKg 225 S8-12	60m6	140	18h9	64	505	360	865	18	400	350j6	450	5	18	8
2SKg 225 M8-12	60m6	140	18h9	64	505	360	890	18	400	350j6	450	5	18	8
2SKg 250 M8-12	65m6	140	18h9	69	540	405	965	19	500	450j6	550	5	18	8
2SKg 280 S8-12	75m6	140	20h9	79,5	620	440	1040	20	500	450j6	550	5	18	8
2SKg 280 M8-12	75m6	140	20h9	79,5	620	440	1040	20	500	450j6	550	5	18	8
2SKg 315 S8-12	80m6	170	22h9	85	620	440	1210	22	600	550j6	660	6	22	8
2SKg 315 M8-12	80m6	170	22h9	85	620	440	1210	22	600	550j6	660	6	22	8


## **Dimensions for FLANGE MOUNTED MOTORS - IM B5, IM V1**

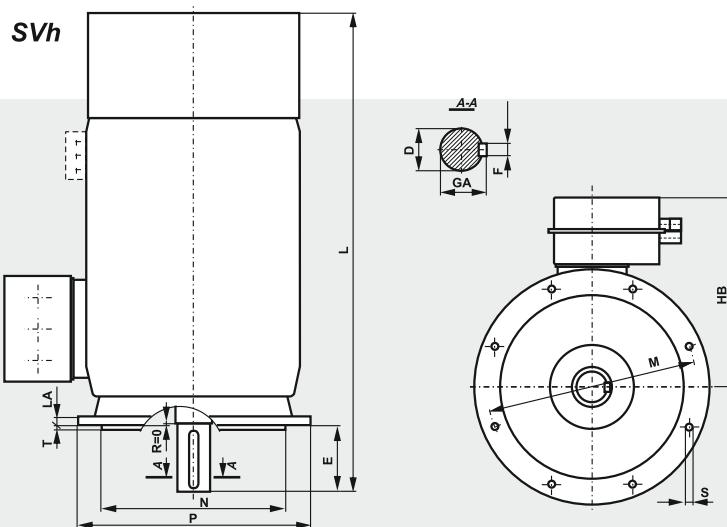

Motor type	Poles	D	E	F	GA	HB	L	LA	M	N	P	S	T
SVh 355...s*	4÷8	100	210	28	106	640	1955	24	740	680	800	22	6
SVh 400...s*	4÷8	110	210	28	116	725	2016	37	940	880	1000	23	6
SVh 450...s*	4÷12	110	210	28	116	835	2162	30	1080	1000	1150	28	6
SVh 500...s*	4÷12	120	210	32	127	835	2505	30	1080	1000	1150	28	6

\* - the SVh motors may operate only in vertical position IM V1.

## **Dimensions for FOOT/FLANGE MOUNTED MOTORS - IM B35**

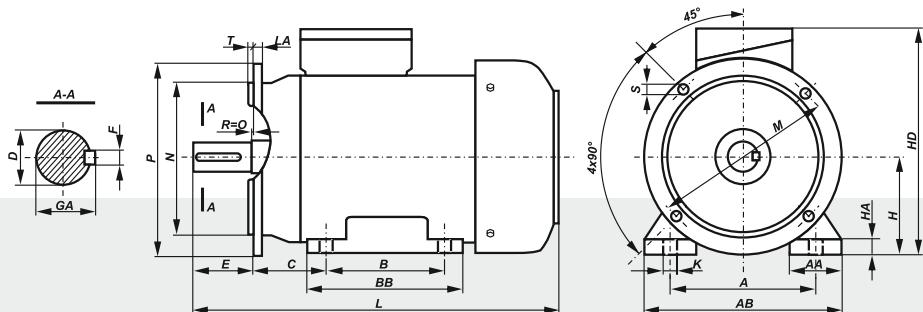


Motor type	A	B	C	D	E	F	GA	H	K	M	N	P	S	LA	T	AA	AB	BB	HA	HD	L
SLh 56-A	90	71	36	9j6	20	3h9	10,2	56	8	100	80j6	120	7	8	3	30	110	92	7	154	183
SLh 56-B	90	71	36	9j6	20	3h9	10,2	56	8	100	80j6	120	7	8	3	30	110	92	7	154	193
SLh 63-A	100	80	40	11j6	23	4h9	12,5	63	10	115	95j6	140	10	9	3	36	124	106	8,5	165	200
SLh 63-B	100	80	40	11j6	23	4h9	12,5	63	10	115	95j6	140	10	9	3	36	124	106	8,5	165	210
SLh 71-A	112	90	45	14j6	30	5h9	16	71	10	130	110j6	160	10	9	3,5	45	142	116	8	182	223
SLh 71-B	112	90	45	14j6	30	5h9	16	71	10	130	110j6	160	10	9	3,5	45	142	116	8	182	245
SLh 80-A	125	100	50	19j6	40	6h9	21,5	80	10	165	130j6	200	12	10	3,5	55	160	130	9	200	266
SLh 80-B	125	100	50	19j6	40	6h9	21,5	80	10	165	130j6	200	12	10	3,5	55	160	130	9	200	278
3SIEL 80-A	125	100	50	19j6	40	6h9	21,5	80	10	165	130j6	200	12	10	3,5	55	160	130	9	200	278
3SIEL 80-B	125	100	50	19j6	40	6h9	21,5	80	10	165	130j6	200	12	10	3,5	55	160	130	9	200	306
3SIEL 90S-2,4,6	140	100	56	24j6	50	8h9	27	90	10	165	130j6	200	12	8	3,5	47	182	153	10	238	331
3SIEL 90L-2	140	125	56	24j6	50	8h9	27	90	10	165	130j6	200	12	8	3,5	47	182	153	10	238	331
3SIEL 90L-4,6	140	125	56	24j6	50	8h9	27	90	10	165	130j6	200	12	8	3,5	47	182	153	10	238	356
3SIEL 100L-2,6	160	140	63	28j6	60	8h9	31	100	12	215	180j6	250	15	11	4	52	202	170	12	257	377
3SIEL 100L-4A,4B	160	140	63	28j6	60	8h9	31	100	12	215	180j6	250	15	11	4	52	202	170	12	257	417
3SIEL 112M-2,6	190	140	70	28j6	60	8h9	31	112	12	215	180j6	250	15	12	4	52	222	170	14	280	398
3SIEL 112M-4	190	140	70	28j6	60	8h9	31	112	12	215	180j6	250	15	12	4	52	222	170	14	280	425
3SIEL 132S	216	140	89	38k6	80	10h9	41	132	12	265	230j6	300	15	12	4	61	266	220	18	329	512
3SIEL 132M	216	178	89	38k6	80	10h9	41	132	12	265	230j6	300	15	12	4	61	266	220	18	329	512
3SIEL 160M	254	210	108	42k6	110	12h9	45	160	15	300	250j6	350	19	13	5	81	320	200	25	383	643
3SIEL 160L	254	254	108	42k6	110	12h9	45	160	15	300	250j6	350	19	13	5	81	320	300	25	383	643
3SIEL 180M	279	241	121	48k6	110	14h9	51,5	180	15	300	250j6	350	19	13	5	92	353	320	27	414	723
3SIEL 180L	279	279	121	48k6	110	14h9	51,5	180	15	300	250j6	350	19	13	5	92	353	320	27	414	723




# General Purpose 3-phase Induction Motors
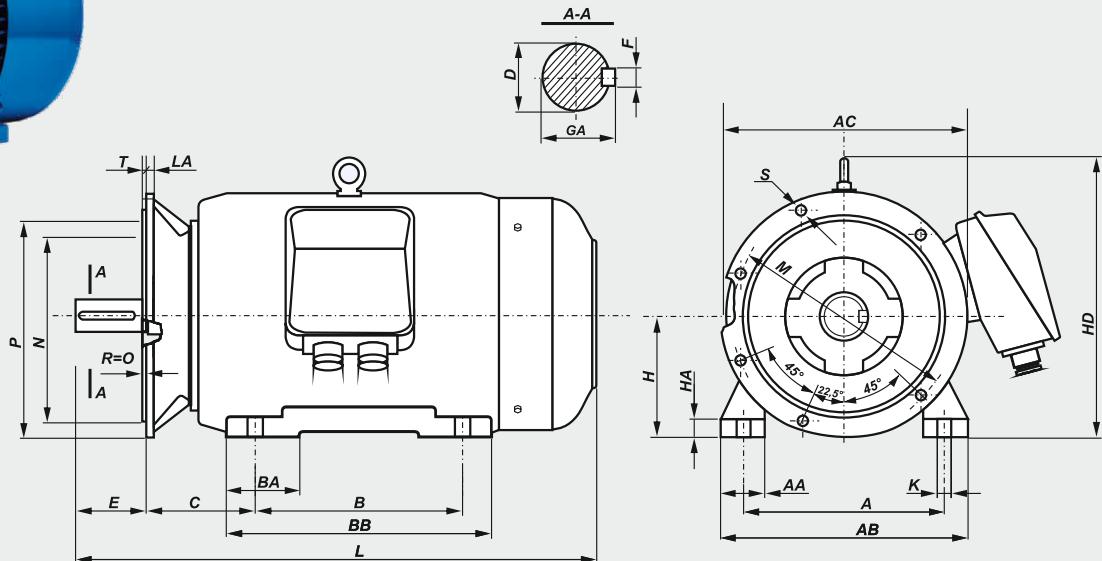
## Dimensions for FOOT/FLANGE MOUNTED MOTORS - IM B35




Motor type	A	B	C	D	E	F	GA	H	HA	K	AA	AB	AC	BA	BB	HD	L	LA	M	N	P	T	S	Φ Holes
2SLg 200 L8-12	318	305	133	55m6	110	16h9	59	200	32	19	80	400	450	100	380	485	825	16,5	350	300	400	5	18	4
2SLg 225 S8-12	356	286	149	60m6	140	18h9	64	225	34	19	85	445	505	110	355	535	865	18	400	350	450	5	18	8
2SLg 225 M8-12	356	311	149	60m6	140	18h9	64	225	34	19	85	445	505	110	380	535	890	18	400	350	450	5	18	8
2SLg 250 M8-12	406	349	168	65m6	140	18h9	69	250	36	24	90	495	540	120	420	590	965	19	500	450	550	5	18	8
2SLg 280 S8-12	457	368	190	75m6	140	20h9	79,5	280	40	24	100	560	620	165	520	660	1040	20	500	450	550	5	18	8
2SLg 280 M8-12	457	419	190	75m6	140	20h9	79,5	280	40	24	100	560	620	165	520	660	1040	20	500	450	550	5	18	8
2SLg 315 S8-12	508	406	216	80m6	170	22h9	85	315	46	28	105	610	620	190	560	695	1210	22	600	550	660	6	22	8
2SLg 315 M8-12	508	457	216	80m6	170	22h9	85	315	46	28	105	610	620	190	560	695	1210	22	600	550	660	6	22	8

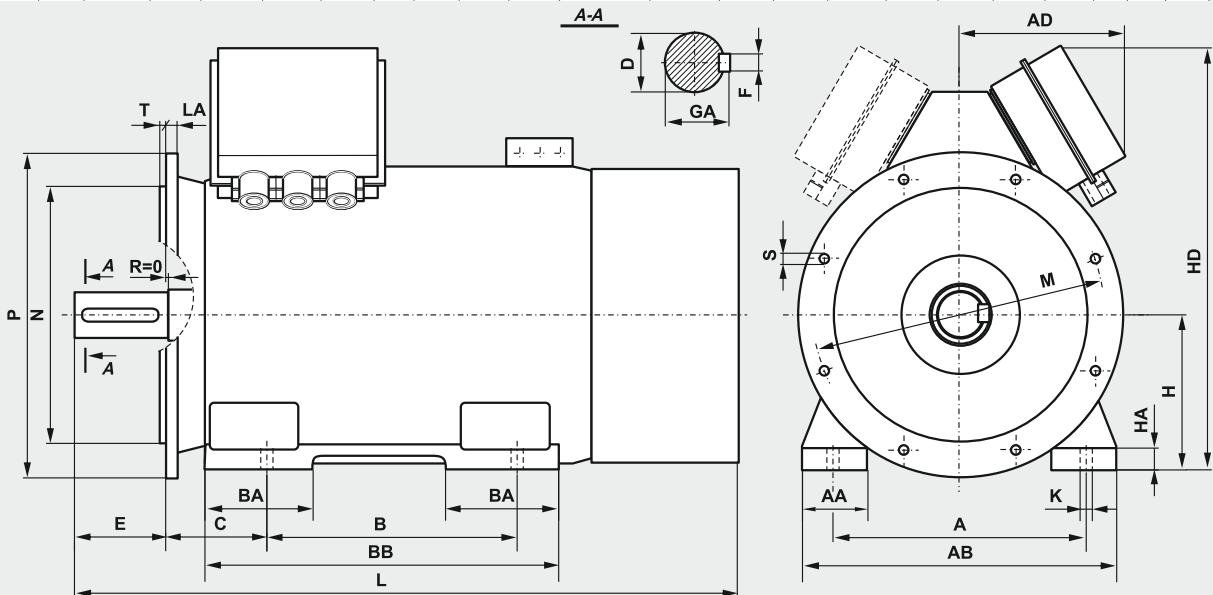

Type of motor	Poles	A	B	C	D	E	F	GA	H	HA	K	AA	AB	AD	BA	BB	HD	L	LA	M	N	P	S	T
SLh 355...s	2	610	900	254	70	140	20	74,5	355	45	28	160	730	344	265	1045	995	1854	24	740	680	800	22	6
SLh 355...s	4÷8	610	900	254	100	210	28	106	355	45	28	160	730	344	265	1045	995	1924	24	740	680	800	22	6
SLh 400...s	2	686	1000	280	80	170	22	85	400	50	35	175	840	520	265	1160	1255	2031	30	940	880	1000	25	6
SLh 400...s	4÷8	686	1000	280	110	210	28	116	400	50	35	175	840	520	265	1160	1255	2016	30	940	880	1000	25	6
SLh 450...s	4÷12	750	1120	315	110	210	28	116	450	60	35	205	940	560	340	1320	1356	2162	30	1080	1000	1150	28	6
SLh 500...s	4÷10	850	1250	355	120	210	32	127	500	70	42	223	1050	560	300	1450	1470	2505	30	1080	1000	1150	28	6


## Dimensions for FLANGE MOUNTED MOTORS - IM B14

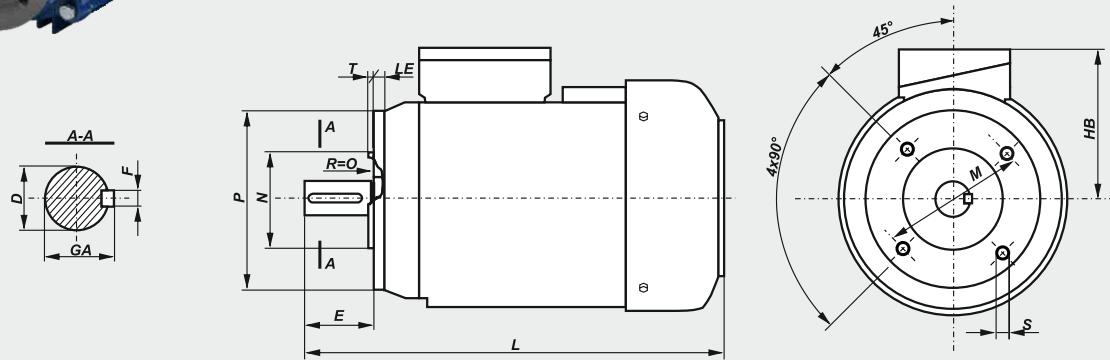

Motor type	Flange	D	E	F	GA	M	N	P	S	T	LE	HB	L
SKh 56-.A1	B14/C1	9j6	20	3h9	10,2	85	70j6	105	M6	2,5	15	98	183
SKh 56-.A2	B14/C2	9j6	20	3h9	10,2	65	50j6	80	M5	2,5	12,5	98	183
SKh 56-.B1	B14/C1	9j6	20	3h9	10,2	85	70j6	105	M6	2,5	15	98	193
SKh 56-.B2	B14/C2	9j6	20	3h9	10,2	65	50j6	80	M5	2,5	12,5	98	193
SKh 63-.A1	B14/C1	11j6	23	4h9	12,5	100	80j6	120	M6	3	14	102	200
SKh 63-.A2	B14/C2	11j6	23	4h9	12,5	75	60j6	90	M5	2,5	9,5	102	200
SKh 63-.B1	B14/C1	11j6	23	4h9	12,5	100	80j6	120	M6	3	14	102	210
SKh 63-.B2	B14/C2	11j6	23	4h9	12,5	75	60j6	90	M5	2,5	9,5	102	210
SKh 71-.A1	B14/C1	14j6	30	5h9	16	115	95j6	140	M8	3	14	111	223
SKh 71-.A2	B14/C2	14j6	30	5h9	16	85	70j6	105	M6	2,5	12	111	223
SKh 71-.B1	B14/C1	14j6	30	5h9	16	115	95j6	140	M8	3	14	111	245
SKh 71-.B2	B14/C2	14j6	30	5h9	16	85	70j6	105	M6	2,5	12	111	245
SKh 80-.A1	B14/C1	19j6	40	6h9	21,5	130	110j6	160	M8	3,5	14	120	266
SKh 80-.A2	B14/C2	19j6	40	6h9	21,5	100	80j6	120	M6	3	12	120	266
SKh 80-.B1	B14/C1	19j6	40	6h9	21,5	130	110j6	160	M8	3,5	14	120	278
SKh 80-.B2	B14/C2	19j6	40	6h9	21,5	100	80j6	120	M6	3	12	120	278
3SIEK 80-.A1	B14/C1	19j6	40	6h9	21,5	130	110j6	160	M8	3,5	14	119	278
3SIEK 80-.A2	B14/C2	19j6	40	6h9	21,5	100	80j6	120	M6	3	12	119	306
3SIEK 80-.B1	B14/C1	19j6	40	6h9	21,5	130	110j6	160	M8	3,5	14	119	278
3SIEK 80-.B2	B14/C2	19j6	40	6h9	21,5	100	80j6	120	M6	3	12	119	306
3SIEK 90S 2,4,6,L2	B14/C1	24j6	50	8h9	27	130	110j6	160	M8	3,5	10	148	331
3SIEK 90S 2,4,6,L2	B14/C2	24j6	50	8h9	27	115	95j6	140	M8	3	10	148	331
3SIEK 90L 4,6	B14/C1	24j6	50	8h9	27	130	110j6	160	M8	3,5	10	148	356
3SIEK 90L 4,6	B14/C2	24j6	50	8h9	27	115	95j6	140	M8	3	10	148	356
3SIEK 100L2,6	B14/C1	28j6	60	8h9	31	165	130j6	200	M10	3,5	12	157	377
3SIEK 100L2,6	B14/C2	28j6	60	8h9	31	130	110j6	160	M8	3,5	12	157	377
3SIEK 100L4A,4B	B14/C1	28j6	60	8h9	31	165	130j6	200	M10	3,5	12	157	417
3SIEK 100L4A,4B	B14/C2	28j6	60	8h9	31	130	110j6	160	M8	3,5	12	157	417
3SIEK 112M2,6	B14/C1	28j6	60	8h9	31	165	130j6	200	M10	3,5	12	168	398
3SIEK 112M2,6	B14/C2	28j6	60	8h9	31	130	110j6	160	M8	3,5	12	168	398
3SIEK 112M4	B14/C1	28j6	60	8h9	31	165	130j6	200	M10	3,5	12	168	425
3SIEK 112M4	B14/C2	28j6	60	8h9	31	130	110j6	160	M8	3,5	12	168	425
3SIEK 132S	B14/C1	38k6	80	10h9	41	215	180j6	250	M12	4	12	197	512
3SIEK 132S	B14/C2	38k6	80	10h9	41	165	130j6	200	M10	3,5	12	197	512
3SIEK 132M	B14/C1	38k6	80	10h9	41	215	180j6	250	M12	4	12	197	512
3SIEK 132M	B14/C2	38k6	80	10h9	41	165	130j6	200	M10	3,5	12	197	512

## Dimensions for FLANGE MOUNTED MOTORS - IM B14

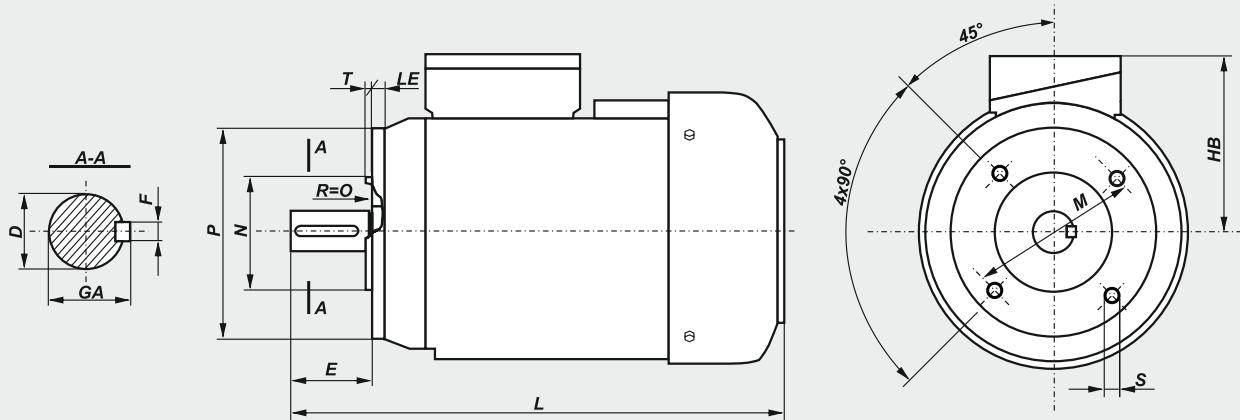
MOTORS series Sh and Sg 2p=8



Motor type	Flange	D	E	F	GA	M	N	P	S	T	LE	HB	L
SKh 90S ...	B14/C2	24j6	50	8h9	27	115	95j6	140	M8	3	10	130	305
SKh 90L ...	B14/C1	24j6	50	8h9	27	130	110j6	160	M8	3,5	10	130	330
SKh 90L ...	B14/C2	24j6	50	8h9	27	115	95j6	140	M8	3	10	130	330
SKg 100L ...	B14/C1	28j6	60	8h9	31	165	130j6	200	M10	3,5	12	140	376
SKg 100L ...	B14/C2	28j6	60	8h9	31	130	110j6	160	M8	3,5	12	140	376
SKg 112M ...	B14/C1	28j6	60	8h9	31	165	130j6	200	M10	3,5	12	164	384
SKg 112M ...	B14/C2	28j6	60	8h9	31	130	110j6	160	M8	3,5	12	164	384
SKg 132S ...	B14/C1	38k6	80	10h9	41	215	180j6	250	M12	4	12	178	463
SKg 132S ...	B14/C2	38k6	80	10h9	41	165	130j6	200	M10	3,5	12	178	463
SKg 132S-2B	B14/C1	38k6	80	10h9	41	215	180j6	250	M12	4	12	178	501
SKg 132S-2B	B14/C2	38k6	80	10h9	41	165	130j6	200	M10	3,5	12	178	501
SKg 132M ...	B14/C1	38k6	80	10h9	41	215	180j6	250	M12	4	12	178	501
SKg 132M ...	B14/C2	38k6	80	10h9	41	165	130j6	200	M10	3,5	12	178	501
SKg 160M ...	B14/C1	42k6	110	12h9	45	265	230j6	300	M12	4	13	210	612
SKg 160M...	B14/C2	42k6	110	12h9	45	215	180j6	250	M12	4	20	210	612
SKg 160L ...	B14/C1	42k6	110	12h9	45	265	230j6	300	M12	4	13	210	656
SKg 160L ...	B14/C2	42k6	110	12h9	45	215	180j6	250	M12	4	20	210	656

**List of Motor parts**

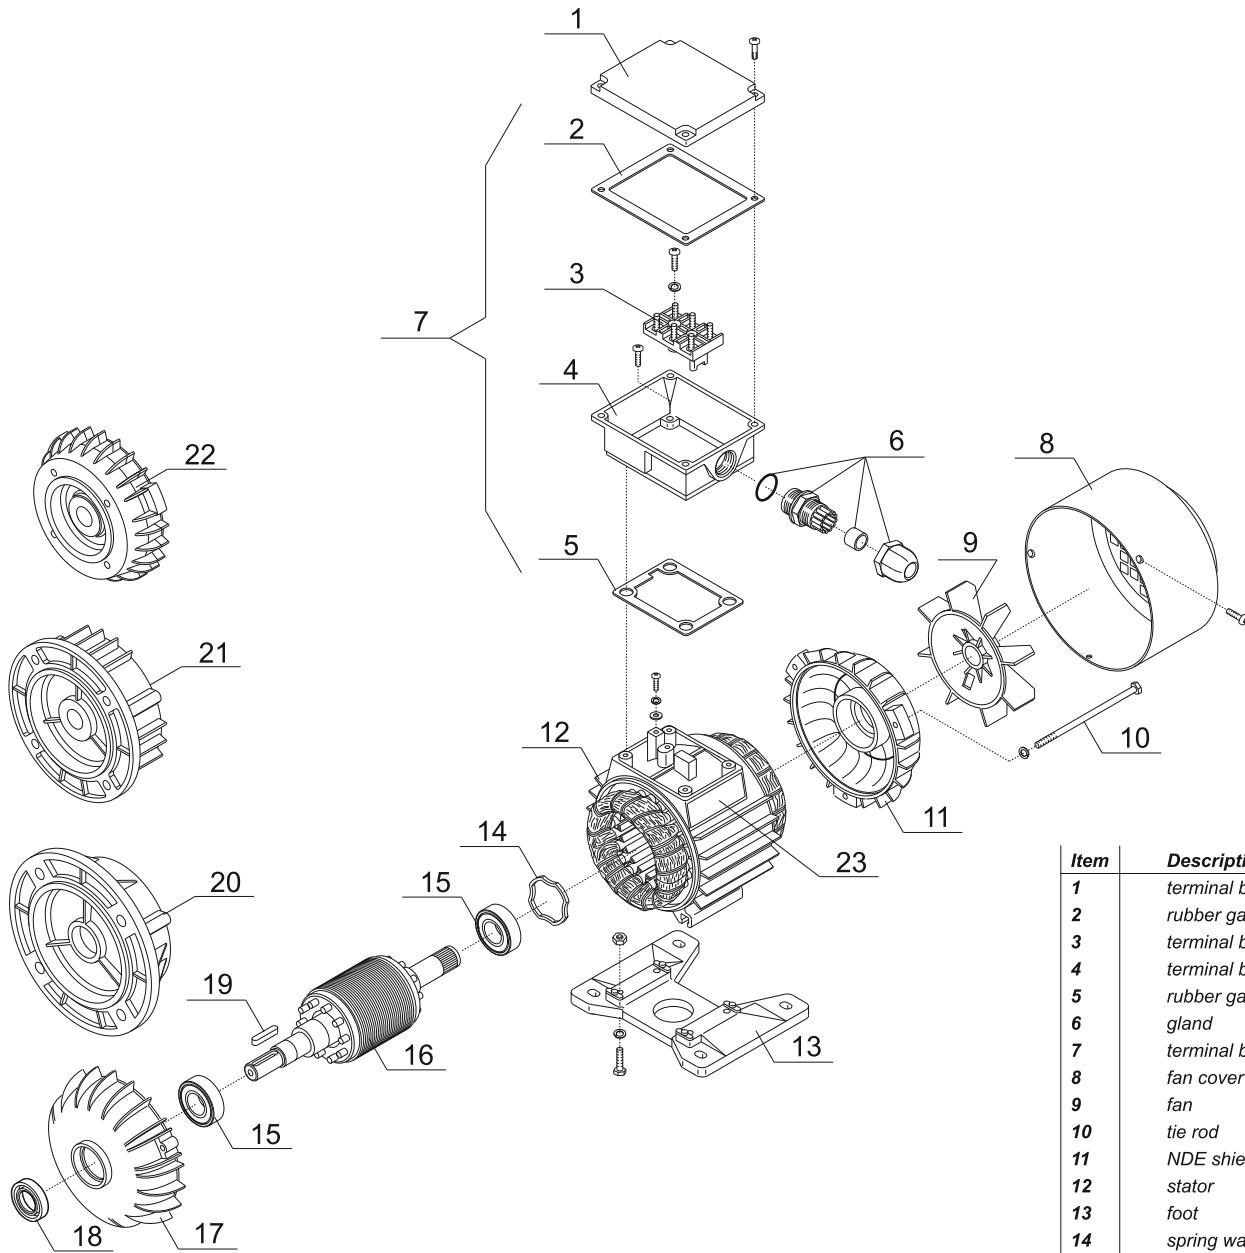**Frame Size: 56-80**  
**Motor series 3SIE and Sh**




Item	Description
1	terminal box cover
2	rubber gasket
3	terminal board
4	terminal box
5	rubber gasket
6	gland
7	terminal box complete
8	fan cover
9	fan
10	tie rod
11	NDE shield
12	stator
13	foot
14	spring washer
15	bearing
16	rotor
17	DE shield
18	shaft seal
19	key
20	flange B5
21	flange B14/C1
22	flange B14/C2
23	name plate

DE - drive end

NDE - non drive end

**Frame Size: 90÷180**  
**Motor series 3SIE, Sg and Sh (2p = 8 ÷ 12)**

**List of Motor parts**

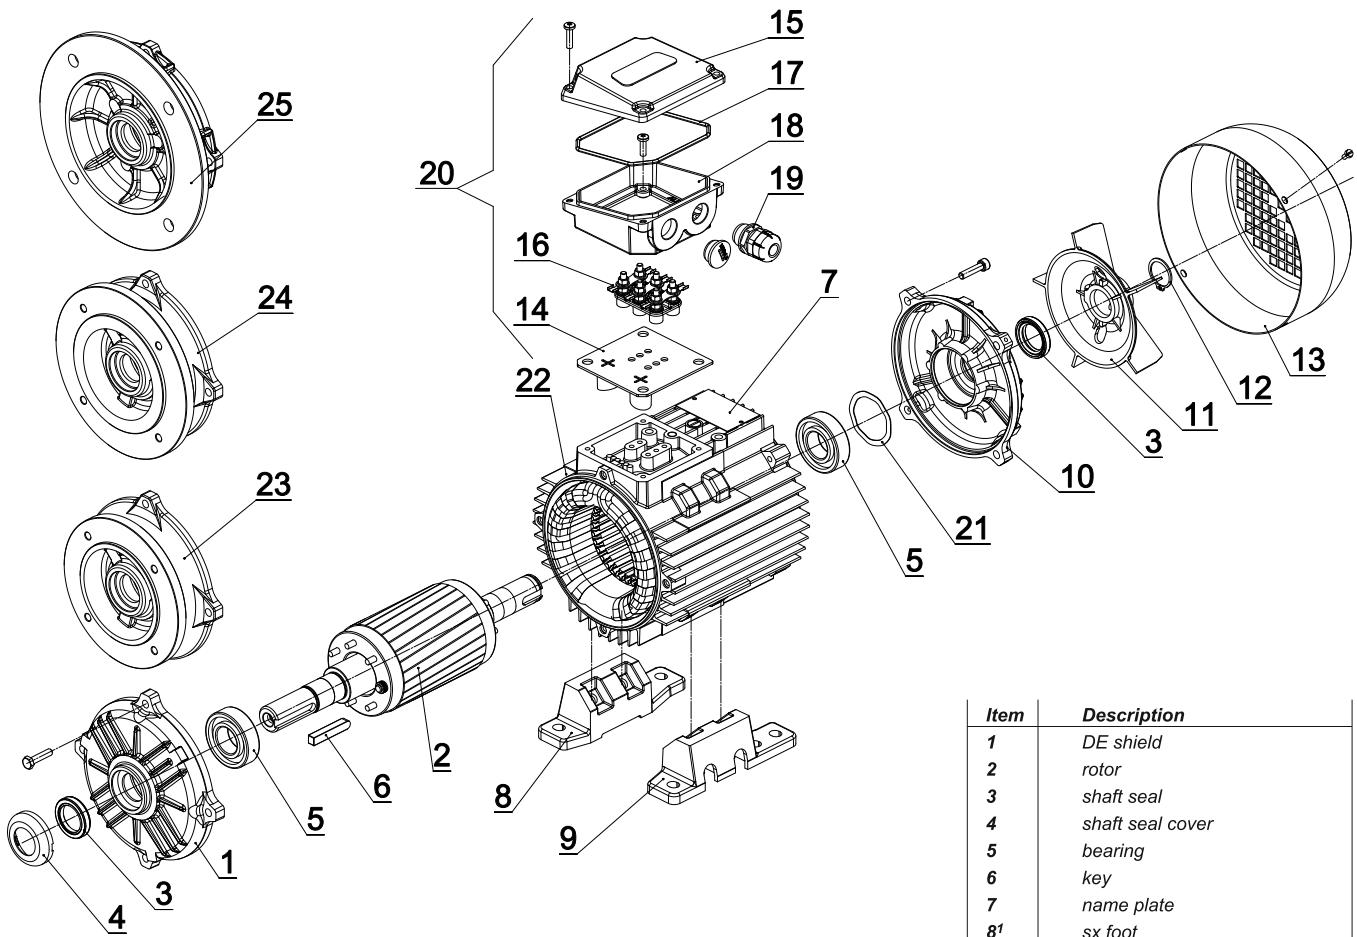

Item	Description
1	DE shield
2	rotor
3	shaft seal
4	shaft seal cover
5	bearing
6	key
7	name plate
8 <sup>1</sup>	sx foot
9 <sup>1</sup>	dx foot
10	NDE shield
11	fan
12	seeger ring
13	fan cover
14	rubber gasket
15	terminal box cover
16	terminal board
17	rubber gasket
18	terminal box
19	glands
20	terminal box complete
21	spring washer
22	stator
23 <sup>2</sup>	flange B14/C2
24 <sup>2</sup>	flange B14/C1
25	flange B5


DE - drive end  
 NDE - non drive end

<sup>1</sup>- for frame size 132 - 180 feet can be screwed or integrated with the motor housing,

<sup>2</sup> - only for frame size 90 - 132.

**List of Motor parts**

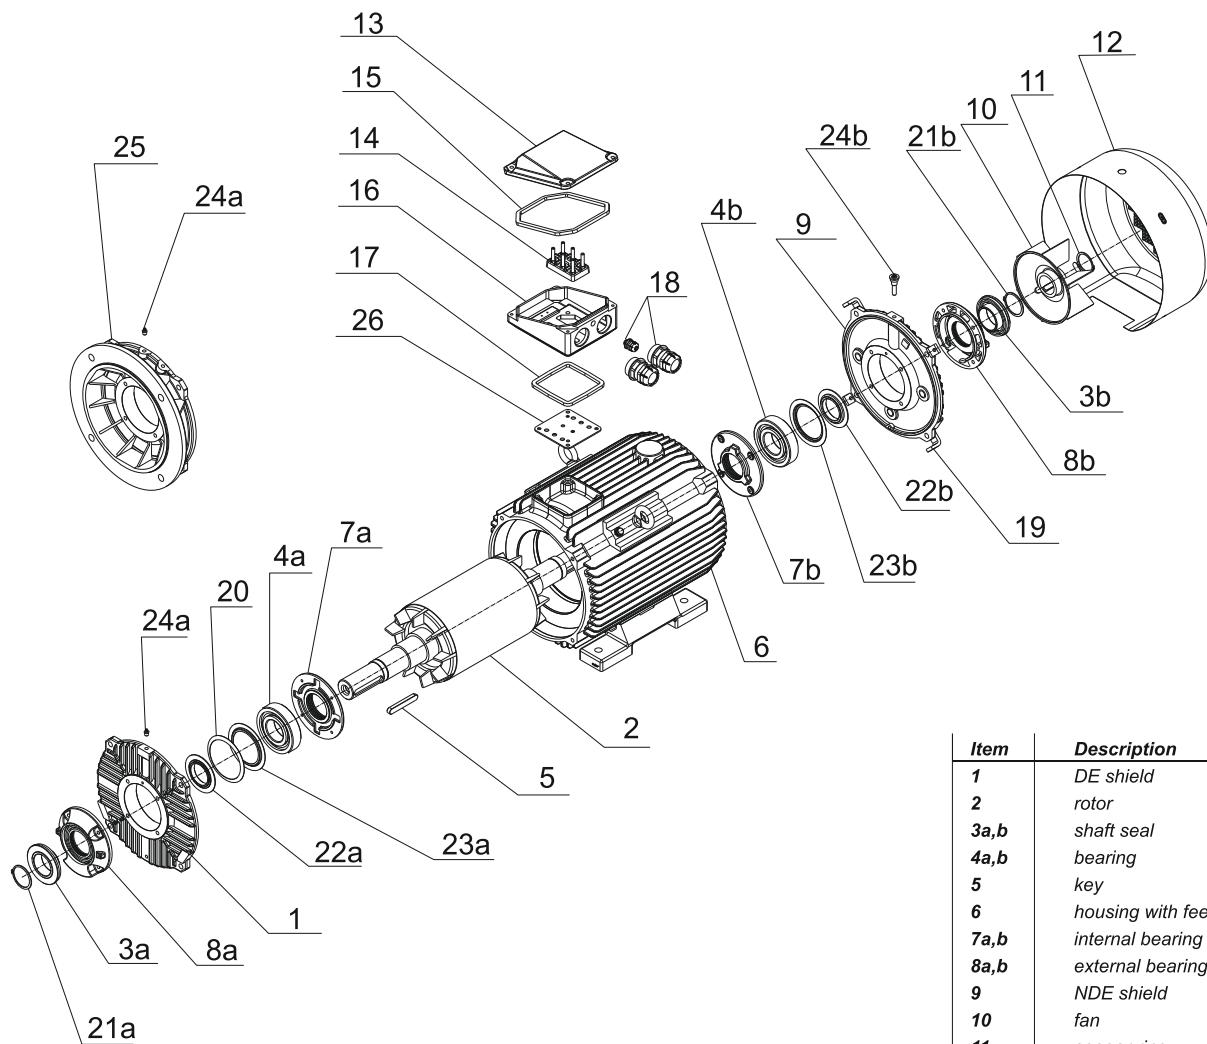**Frame Size: 200÷355**  
**Motor series 3SIE**




Item	Description
1	DE shield
2	rotor
3a,b	shaft seal
4a,b	bearing
5	key
6	housing with feet
7a,b	internal bearing cap
8a,b	external bearing cap
9	NDE shield
10	fan
11	seeger ring
12	fan cover
13	terminal box cover
14	terminal board
15	rubber gasket
16	terminal box housing
17	rubber gasket
18	cable glands
19	fan cover support
20	spring washer
21a,b	seeger ring
22a,b	grease shield
23a,b	bearing internal ring
24a,b	grease nipple
25	flange B5
26	rubber gasket

DE - drive end

NDE - non drive end

**Frame Size: 200÷315**  
**Motor series 2Sg (2p = 8 ÷ 12)**

**List of Motor parts**

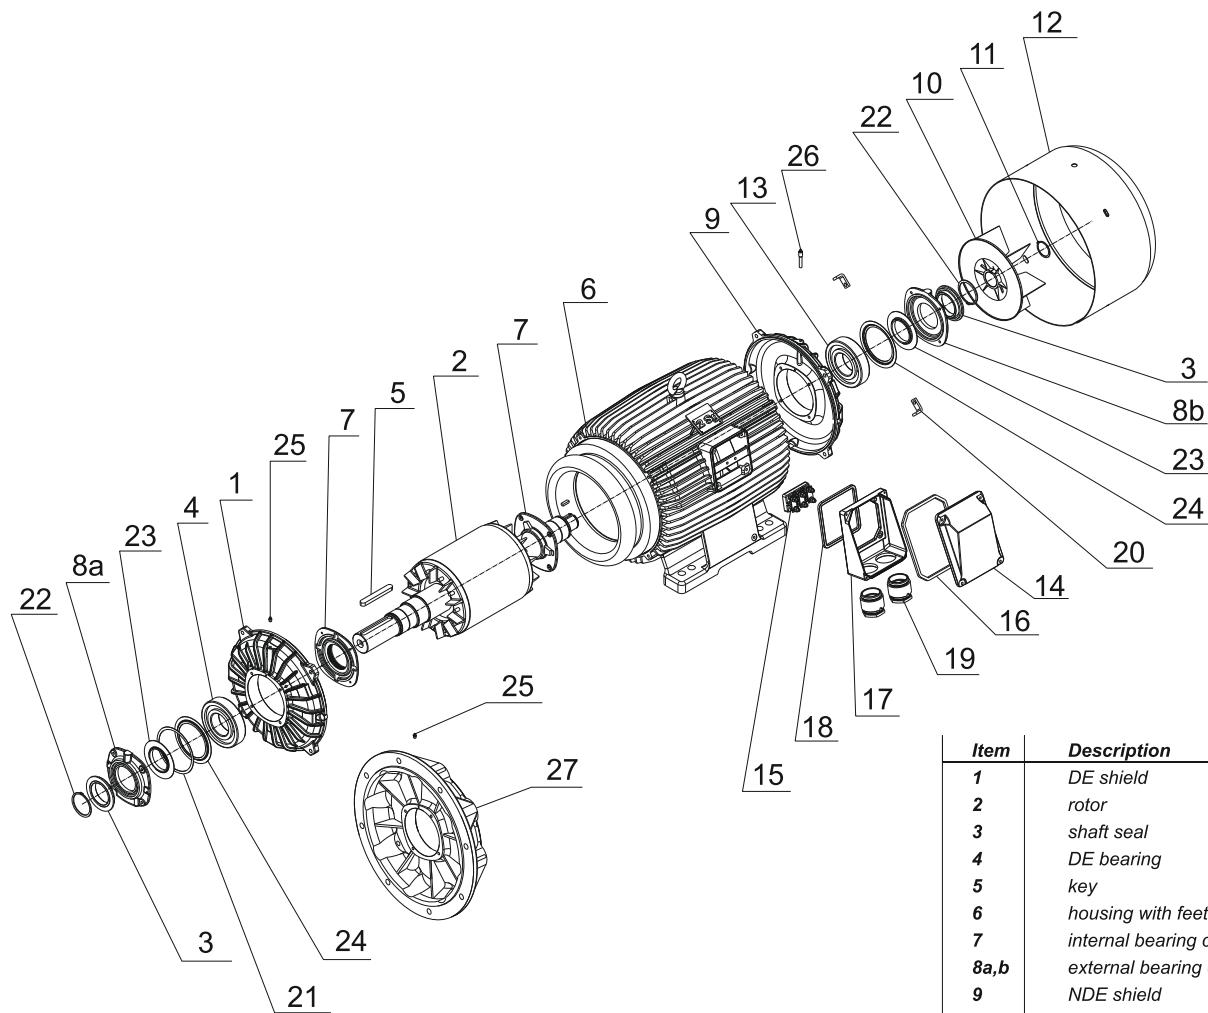

Item	Description
1	DE shield
2	rotor
3	shaft seal
4	DE bearing
5	key
6	housing with feet
7	internal bearing cap
8a,b	external bearing cap
9	NDE shield
10	fan
11	seeger ring
12	fan cover
13	NDE bearing
14	terminal box cover
15	terminal cover support
16	rubber gasket
17	terminal box housing
18	rubber gasket
19	cable glands
20	fan cover support
21	spring washer
22	seeger ring
23	grease shield *
24	bearing internal ring *
25	DE grease nipple
26	NDE grease nipple
27	flange B5

DE - drive end  
 NDE - non drive end

\* only for size 315

## PRODUCT RANGE

GENERAL PURPOSE 3-PHASE INDUCTION MOTORS	Three-phase motors with squirrel-cage rotor series (2)Sg(m), Sh. High efficiency motors series 2SIE, 3SIE and 4SIE (Efficiency classes IE1, IE2, IE3, IE4)	from 0,04kW up to 1400kW	general purpose, pumps, fans, compressors, specific requirements relating to the highest efficiency	
GENERAL PURPOSE 1-PHASE INDUCTION MOTORS	Single-phase motors with squirrel-cage rotor series SEh(R), SEMh(R). - motors with standard starting torque - motors with increased starting torque - motors with high starting torque.	from 0,04kW up to 4kW	general purpose, pumps, fans, compressors, wood machines, machines and devices for food processing, mixers for building	
HIGH VOLTAGE INDUCTION MOTORS	Three-phase squirrel-cage high voltage and high efficiency motors series Sh with cast-iron housing. High voltage motors with module construction (steel/welded housing) series Sf-E and Sfw.	from 160kW up to 3150kW	general industrial use, drives used for own needs of power plants (pumps, fans, coal mills, conveyors)	
BRAKE MOTORS	Three-phase and single-phase brake motors with AC and DC brakes.	from 0,04kW up to 160kW	applied in case of necessity to stop the motor suddenly	
MOTORS WITH FOREIGN COOLING	Three-phase 3-phase induction motors with foreign cooling.	from 0,06kW up to 250kW	drives adapted for speed regulation by frequency converter	
EXPLOSION-PROOF MOTORS	Increased safety motors.  Flame-proof motors.	from 0,06kW up to 22kW  from 0,75kW up to 315kW	adapted for operation in areas endangered by explosion (without methane)  application in an atmosphere where a mixture of explosive gas and vapours may occur	
NEMA MOTORS	Low voltage NEMA motors SIE series (in compliance with the NEMA PREMIUM requirements).	from 1HP up to 250HP	general industrial application, pumps, fans	
TRACTION MOTORS	Traction motors and traction generators.	from 50kW up to 1500kW	various traction vehicles: trams (including low-deck trams), trolleybusses, subway and locomotives	



Industrieweg 16  
NL-3881 LB Putten  
T +31 (0) 341- 36 96 96  
F +31 (0) 341- 36 96 90  
E [info@kolmer.nl](mailto:info@kolmer.nl)  
I [www.kolmer.nl](http://www.kolmer.nl)